


## SS22B THRU SS220B

### SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Amperes

#### DO-214AA

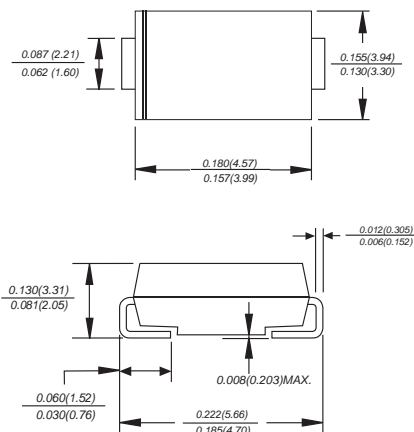

Dimensions in inches and (millimeters)

#### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

#### MECHANICAL DATA

**Case:** JEDEC DO-214AA molded plastic body

**Terminals:** leads solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SS22B	SS23B	SS24B	SS25B	SS26B	SS28B	SS210B	SS215B	SS220B	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at TL (see fig. 1)	$I_{(AV)}$	2.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0									Amps
Maximum instantaneous forward voltage at 2.0A	$V_F$	0.55			0.70		0.85		0.95		Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^{\circ}C$ $T_A=100^{\circ}C$	$I_R$	20			0.5				1		mA
Typical junction capacitance (NOTE 1)	$C_J$	220			180						pF
Typical thermal resistance (NOTE 2)	$R_{qJA}$	75.0				45.0				$^{\circ}C/W$	
Operating junction temperature range	$T_J$	-65 to +125			-65 to +150				-55 to +150		$^{\circ}C$
Storage temperature range	$T_{STG}$	-55 to +150									$^{\circ}C$

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

## RATINGS AND CHARACTERISTIC CURVES SS22B THRU SS220B

