


## US5A THRU US5M

### SURFACE MOUNT ULTRA FAST RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 5.0 Amperes

#### DO-214AB

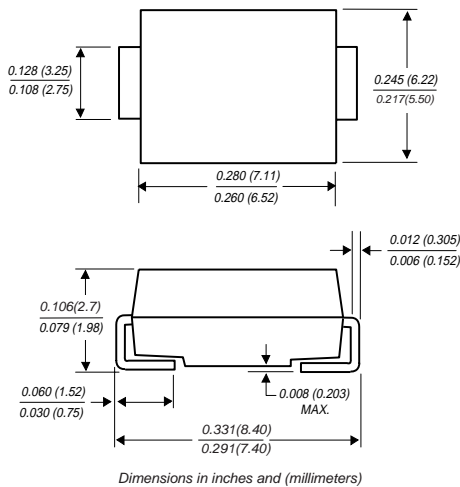

#### FEATURES

The plastic package carries Underwriters Laboratory Flammability Classification 94V-0  
 For surface mounted applications  
 Low reverse leakage  
 Built-in strain relief, ideal for automated placement  
 High forward surge current capability  
 High temperature soldering guaranteed:  
 250°C/10 seconds at terminals  
 Glass passivated chip junction  
 RoHS Compliance  
 Reach Compliance

#### MECHANICAL DATA

**Case:** JEDEC DO-214AB molded plastic body over passivated chip

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight :** 0.22 gram

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	US5A	US5B	US5D	US5G	US5J	US5K	US5M	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_L=55^\circ\text{C}$	$I_{(AV)}$	5.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150.0							Amps
Maximum instantaneous forward voltage at 5.0A	$V_F$	1.0		1.4	1.8			Volts	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	10.0 250.0							$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	50				75			ns
Typical junction capacitance (NOTE 2)	$C_J$	98				82			pF
Typical thermal resistance	$R_{\theta JA}$	47.0							$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +150							$^\circ\text{C}$

**Note:** 1. Reverse recovery condition  $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$   
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

# RATINGS AND CHARACTERISTIC CURVES US5A THRU US5M

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

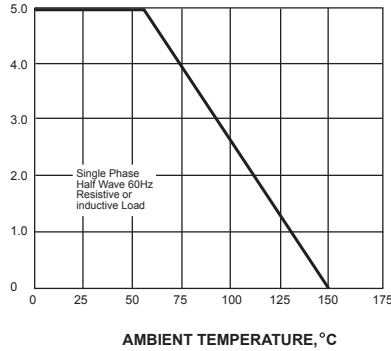

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


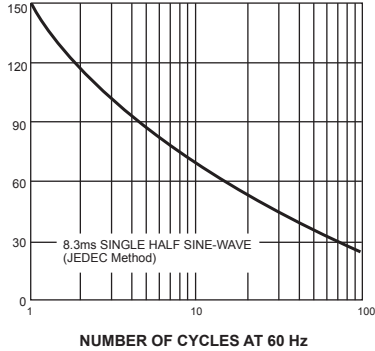


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

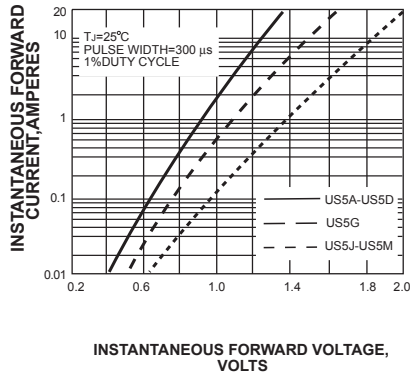

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG. 4- TYPICAL REVERSE CHARACTERISTICS


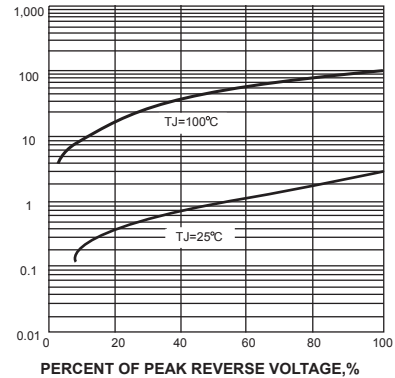


FIG. 5- TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,  $^\circ\text{C}/\text{W}$

FIG. 6- TYPICAL TRANSIENT THERMAL IMPEDANCE

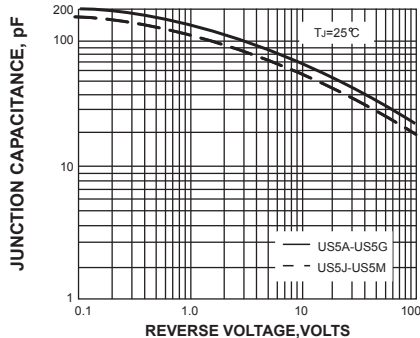